

*model no:*

*HD—P43D3ET*

*HD—P43F3ET*

*HD—P63D3ET*

*HD—P63F3ET*

*HD—P4357EP*

*HD—P6357EP*

## *Grand Isle Series*

PORTABLE RECEPTACLES  
DOME TOP AND FLAT TOP LIDS  
PLANTERS  
ROD AND ROUND PERFORATED  
LINERS

### *maintenance:*

Regular inspection and maintenance of all parts, and fasteners is necessary. Tighten all bolts and nuts. Inspect Tops, Seats, Legs, Braces and Fasteners periodically for wear or vandalism. Replace broken or worn parts immediately or take equipment out of service until repairs are made.

KEEP THIS ASSEMBLY/SPECIFICATION SHEET FOR FUTURE REFERENCE.

## assembly procedures:

**IMPORTANT:** Assemblers should be reasonably skilled in the assembly of commercial grade/heavy duty fabricated steel equipment.

To ensure proper assembly, it is suggested that you take adequate time to locate and identify each part. To prevent scratching of the finished pieces, we recommend this unit to be assembled on a clean, flat, solid, surface with a drop cloth, allowing plenty of working room. **Also please read the instructions and study the sketches very carefully.** A little extra time spent before assembly will be well worth it in performing a complete, proper assembly. Please note that all parts have been pre-cut and pre-drilled.

During the assembly process leave all bolts and nuts "finger tight", until the entire unit is completely assembled. This allows room for movement to level or adjust all seats, tops, benches, framework and braces if necessary. **After final adjustment and leveling, permanently tighten all nuts, bolts and fasteners.**


7 L

### FLAT TOP INSTALLATION:

Attach flat top to receptacle using one 1/4" X 1" hex head screw (17116), two 1/4" flat washer (17007) and one 1/4" hex nut (17017) per each bolt hole.

### DOME TOP INSTALLATION:


Attach dome/flat top to receptacle using one 1/4" X 1" hex head screw (17116), two 1/4" flat washer (17007) and one 1/4" hex nut (17017) per each bolt hole.

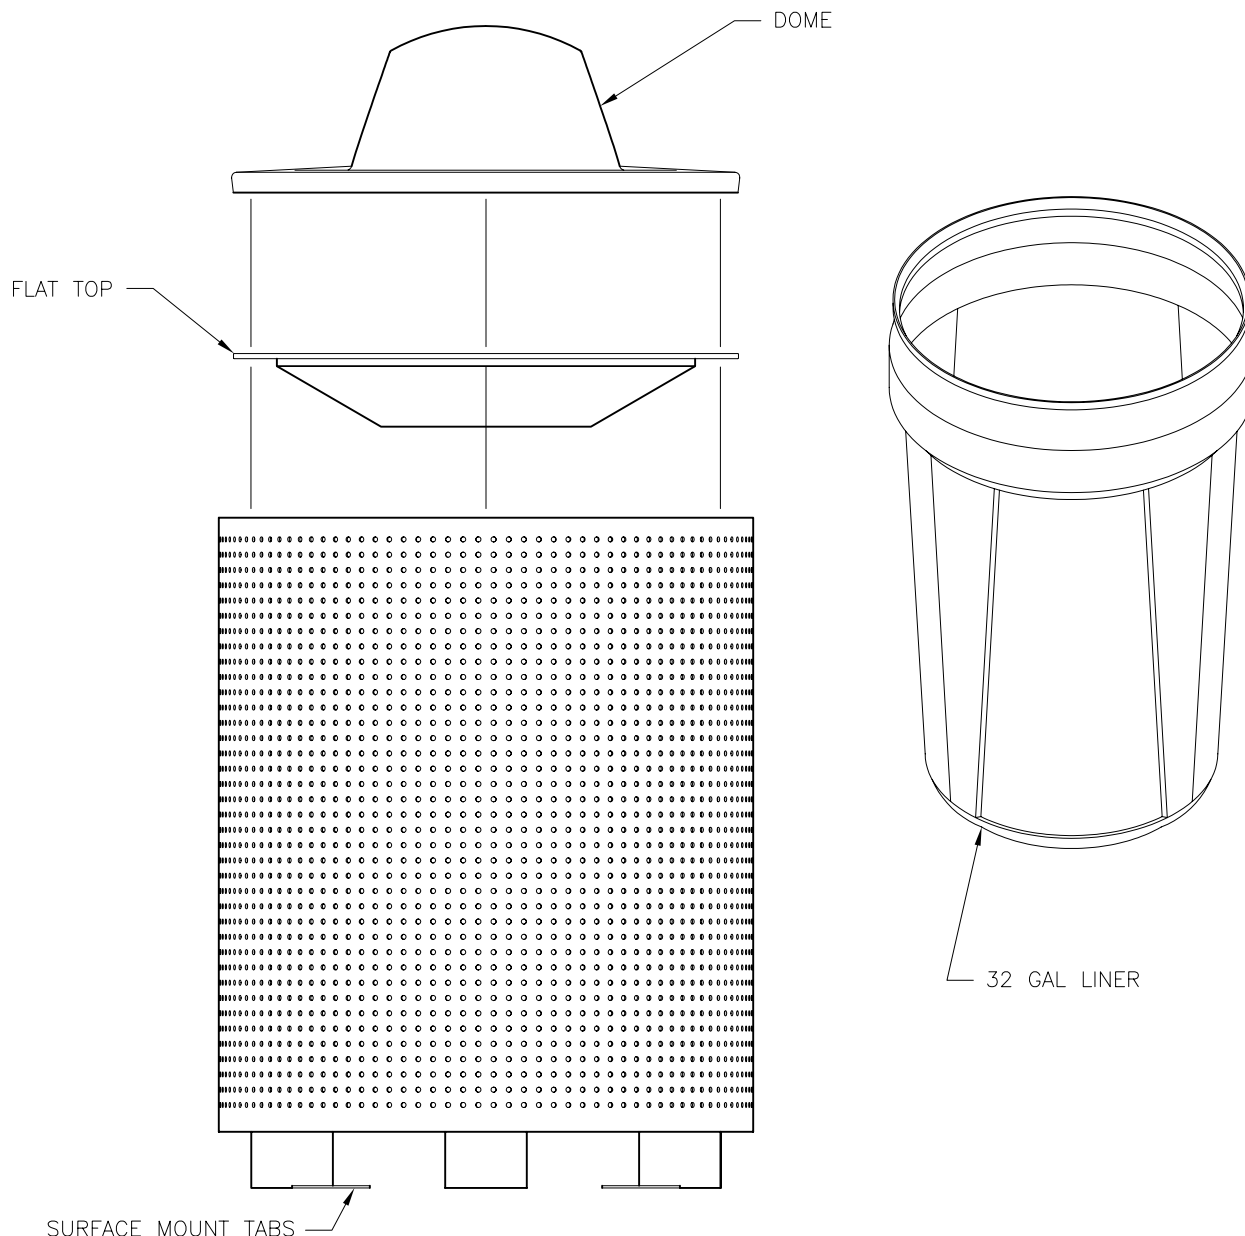


## installation:

**WARNING:** The proper installation of products may depend upon many factors unique to the site, location, or use of a particular product. Consult with your contractor or other professional to determine your specific installation requirements.

*product dimensions:*

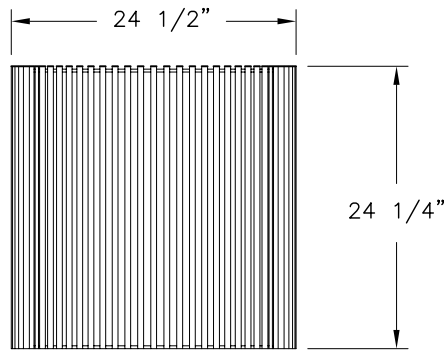


HD-P4357EP

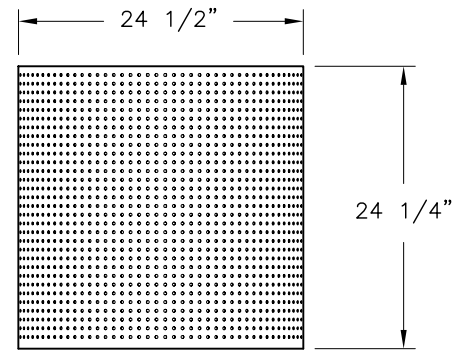


HD-P6357EP


Each Planter comes equipped with a 3/16" thick fiberglass reinforced polyester resin liner. Standard color – black.

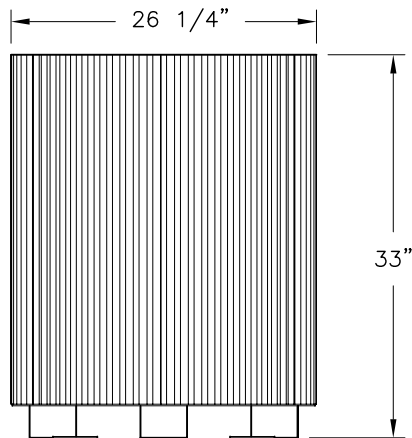


HD-P43F3ET

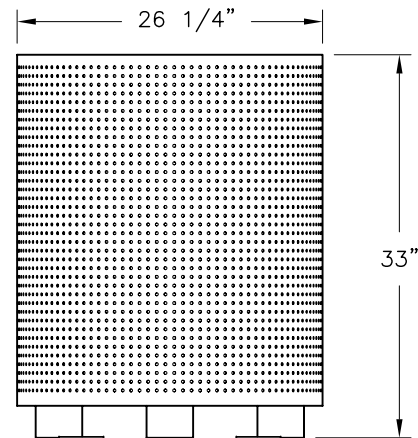

HD-P63F3ET

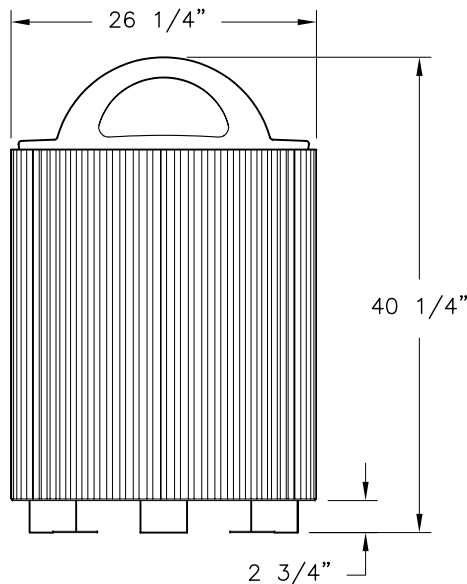

HD-P43D3ET

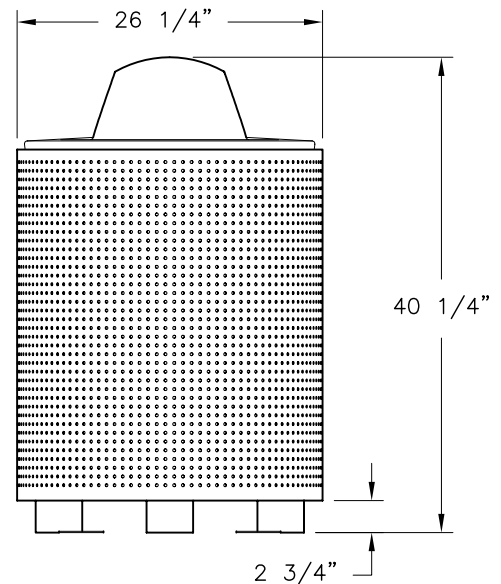

HD-P63D3ET

Each Receptacle comes equipped with a 1/16" thick polyethylene liner. Standard color – black.